


UNO ENGINEERING

THE ENGINEERS ENTERPRISES

SWIVEL JOINT

Made of high tensile steel, suitable to be used as junction element between the pulling rope and the conductor in order to avoid torsional strain accumulation, rotation on balls.

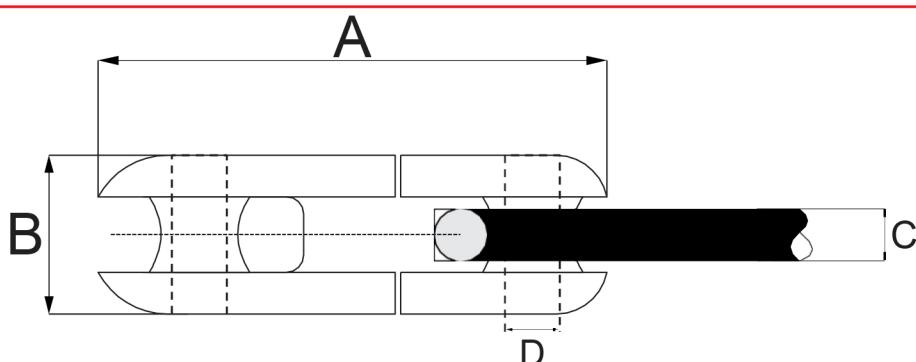

Model	Safe load	Break load	A	B	C	D	Weight
UNO-SJ36	4 Ton	12 Ton	160	37	15	13	0.9 K.G
UNO-SJ45	8 Ton	25 Ton	188	46	20	16	1.2 K.G
UNO-SJ60	20 Ton	60 Ton	256	60	25	24	3.4 K.G
UNO-SJ70	25 Ton	70 Ton	260	68	30	24	4.8 K.G

NOTE: All dimensions are in mm, subject to change without notice